

Digta▶▶

SIMPLY PROFESSIONAL DICTATION



DIGTA 422

THE COMPACTLY DESIGNED DEVICE

FOR PROFESSIONAL USERS

MADE IN GERMANY



The Digta 422 comes with an especially compact housing and is easy to handle. The slim shape and the soft edged design of the bottom fit extremely well into either hand. Thanks to the extra wide slide switch the Digta 422 is comfortable and ergonomically to use. The high-contrast black-and-white display includes LCD technology. The brighter the surrounding light, the stronger the display contrast will be. The clearly arranged Easy Mode panel only displays data that is essential for the recording. The buttons are reduced to performing what is truly necessary to dictations. The user can concentrate on the basics of dictation without being "flooded" with functions allowing professional dictation as fast and easy as never before.

- Easy one-handed operation via slide switch
- 1 GB internal memory for more than 150 hours of voice recordings
- Best sound quality thanks to DSSPro, ideally suitable for speech recognition
- Durable, bright, high contrast black and white display
- Easy switching over from Easy Mode to Menu Mode for further workflow functions and device settings
- Digta Configurator for clearly structured, customised device configuration at the PC
- PIN/PUK protection for the internal memory and secure dictations thanks to DSSPro encryption
- DSSMover for automatic dictation transfer
- Digta Configurator for the comfortable configuration of your device.

www.grundig-gbs.com

Infoline: +49 (0) 911-47 58-4

Your Grundig Business Systems Partner:



A clearly arranged display and basic functions in the Easy Mode




With Digta Station




Easy Mode



turn voice into  action

GRUNDIG
Business Systems

The Display

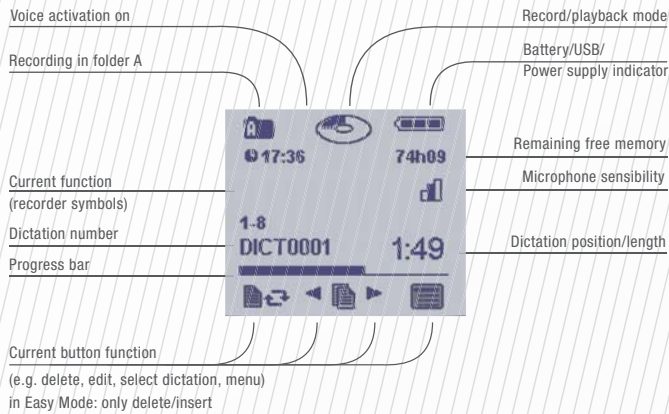

The Controls



FUNCTIONS

<i>MEMORY MEDIUM/FOLDER</i>	Internal memory 1 GB, 1 DSS folder, 5 subfolders A–E, optional Digta Card
<i>DISPLAY</i>	Transflective LCD display in black and white, all functions shown as symbols, menu control with texts available in 9 languages, LED recording
<i>FILE NAME</i>	4 characters for author ID + 4-digit serial number
<i>4 FUNCTIONS SLIDE SWITCH AND FUNCTION KEYS</i>	Assignment: Fast forward, stop, record / playback / rewind, function key (red): record
<i>VARIABLE PLAYBACK SPEED</i>	Can be switched to approx. 1.5x
<i>KEYLOCK</i>	On/Off switch with keylock function
<i>FUNCTION BUTTONS</i>	New button (new dictation), 2 selection buttons, 2 navigation buttons, label in bottom display line
<i>EASY-MODE</i>	Simplified functions: create a new dictation, modify a dictation (overwrite, attach, insert), delete a dictation
<i>MENU-MODE</i>	Menu functions: DSS standard play/DSSPro/encryption, folder selection, automatic standby/off, reset dictation counter, hands-free dictating / workstation operation with foot control, selection of display language
<i>CHANGE OF MODE</i>	Switching over from Easy Mode to Menu Mode and the other way round: Keep on pressing the button „New“ when switching „on“ the device. Device settings (for example microphone sensitivity) or workflow functions in the Menu Mode remain also in the Easy Mode.
<i>WORKFLOW</i>	Author's name, priority level, typist ID, worktype, group, file number / code (can be edited for new dictation). 20 authors' names, typists, worktypes and groups can be edited at the PC each and then stored to the device, Info/Index, postpone a dictation (no transmission to the PC), dictation lock, data list with patient / client data

TECHNICAL DATA DIGTA 422

<i>MEMORY MEDIUM</i>	Internal memory 1 GB with more than 150 hrs. recording time, SD slot for Digta Card
<i>FILE FORMAT</i>	DSS Standard Play / DSSPro Quality Play
<i>MEMORY REQUIREMENT FOR 10 MINUTES SPEECH RECORDING</i>	about 1 MB / about 2 MB
<i>SAMPLE RATE</i>	12 kHz / 16 kHz
<i>AUDIO DATA RATE</i>	approx. 13,5 kbit/s / approx. 28 kbit/s
<i>DOWNLOAD</i>	up to 460 kByte/s
<i>FREQUENCY RESPONSE</i>	200 – 5500 Hz / 200–7500 Hz
	200 – 11000 Hz in PC microphone mode
<i>MAX. OUTPUT POWER</i>	200 mW
<i>SPEAKER</i>	1.1 inch. (28 mm) diameter
<i>MICROPHONE SOCKET</i>	0.14 inch. (3.5 mm) jack
<i>EARPHONE SOCKET</i>	0.14 inch. (3.5 mm) jack, mono (stereo headphones can be used)
<i>PC INTERFACE</i>	USB 1.1, USB 2.0 FS (full speed)
<i>RECHARGEABLE BATTERY 466</i>	NiMH, 1000 mAh
<i>BATTERIES</i>	2 x 1,5 V, Micro/AAA
<i>POWER SOCKET</i>	Mini USB
<i>STORING TEMPERATURE</i>	-20° C to +70° C
<i>OPERATING TEMPERATURE</i>	-15° C to +35° C
<i>DIMENSIONS (WITHOUT PROTRUDING CONTROLS)</i>	Length approx. 5 inch., width approx. 2.13 inch, depth approx. 0.83 inch (127 mm x 54 mm x 21 mm)
<i>WEIGHT</i>	Approx. 3.63 ounce (103 g), including rechargeable battery 466
<i>HOUSING</i>	High quality ABS plastic
<i>COLOUR</i>	Sonic Black

TECHNICAL DATA DIGTA STATION 446

<i>CONNECTIONS</i>	Hirose docking connection (10-pole) for Digta 422 Power supply 5V (Mini USB plug) PC interface (Mini USB plug) Grundig sockets for footswitch 536 and earphones With GBS cable Socket for Kensington security lock (anti-theft protection)
<i>INDICATOR LIGHT (LED)</i>	Green: USB connection Yellow: Charging of rechargeable batteries
<i>DIMENSIONS</i>	(WxHxD): about 90 x 77 x 119 mm
<i>WEIGHT</i>	210 g

SCOPE OF DELIVERY

Digta 422, pouch, USB cable, 2 AAA batteries
Including DSSMover, Digta Configurator and AdapterServerConfig
Available together with further dictation software and speech recognition software.
Simply ask your Grundig Business Systems partner.
The Digta 422 Set comes with additional Digta Station 446, rechargeable battery pack 466 as well as power supply / charger unit

OPTIONAL ACCESSORIES

Digta Card 2in1, Digta DirectMic 941, Digta Earphone 957 Jack, Digta Conference Station, car charger adapter USB, Digta Scan 404, Digta RFID 414
For DigtaStation 446: foot control 536 for handsfree dictation, earphones with GBS cable

The performance features described by Grundig only apply to genuine Grundig accessories. The use of nonGrundig Business Systems accessories or those which are not recommended and approved by Grundig Business Systems automatically void any warranty claims towards Grundig Business Systems.

Grundig Business Systems GmbH Emmericher Straße 17, D90411, Nuremberg,
EMail: info@grundig-gbs.com, Internet: www.grundig-gbs.com. Printed in Germany.
Alterations and availability are subject to change without prior notice.
Ordernumber: HNE 6292 04/2013