




Model names: Digta 7, Digta 7 Push, Digta 7 Premium

Color: black

The sturdy device comes with a one-of-a-kind slide switch offering Touch Pin function. This way you can dictate with your eyes closed, you'll automatically feel the stop position. Plus, the slide switch can be configured to meet your dictation style – making it especially practical for those new to Grundig dictation machines. The display is large and shows all information very clear. Optimum audio quality in the DSSPro recording format (ideally suitable for speech recognition as well), effective workflow functions and highest security standards are a matter of course.

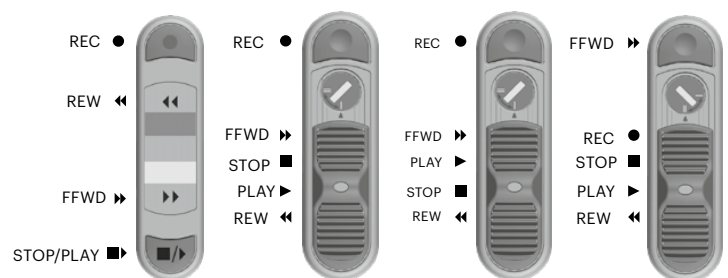

Highlights

- Easy Mode for especially easy operation
- Slide switch offering individual configuration of the function sequence
- 4 GB on-board memory for approximately 600 hours of recording time, extendable with external DigtaCard
- Best sound quality thanks to DSSPro, ideally suitable for speech recognition
- Display: high contrast, transfective, easy-to-read screen design
- Li-Ion rechargeable battery/batteries
- Effective DSS workflow by means of key word allocation
- Pluggable barcode reader
- PIN/PUK protection, UUID, encryption of dictations
- Accessories: Digta Station 447
- DSSMover for automatic dictation transfer
- Digta Configurator for comfortable configuration of your dictation device

Additional Features Digta 7 Premium

- Speech recognition for character entry
- Stereo recordings
- Motion sensor
- Extra workflow functions

The performance features described by Grundig only apply to genuine Grundig accessories. The use of non-Grundig Business Systems accessories or those which are not recommended and approved by Grundig Business Systems automatically void any warranty claims towards Grundig Business Systems.

Printed in Germany. Alterations and availability are subject to change without prior notice.

Display	Transflective LCD display, 16 grey scale values, white background illumination
Screen diagonal	46,5 mm / 1,83 Inch
Resolution	160 x 160 pixel
Memory medium	4 GB of internal memory (approx. 600 h of recording time in DSS), MMC/SD/SDHC slot for Digta Card (up to 32 GB)
Memory capacity	10 min of recordings (data rate)
DSS Standard Play (SP)	approx. 1 MB (13,5 kbit/s)
DSS Pro Quality Play (QP)	approx. 2 MB (26 kbit/s)
WAV Mono	9,6 MB (8 kHz sampling rate, 15 kbit/s) up to 57,6 MB (48 kHz sampling rate, 93 kByte/s)
MP3 Mono	4,7 MB (64 kbit/s) 9,4 MB (128 kbit/s) 14,1 MB (192 kbit/s)
Recording quality/ Frequency range	
DSS Standard Play(SP):	200 - 5 500 Hz, Mono
DSS Pro Quality Play(QP):	200 - 7 500 Hz, Mono
MP3	64, 128, 192 kbit/s, Mono, Stereo
WAV	200 up to 20 000 Hz (according to sampling rate), Mono, Stereo
Play-back speed	From 50% to 150% adjustable in 20 levels
Microphone socket	3.5 mm jack, stereo Impedance 2,2 kOhm (at 1 kHz), Sensitivity – 42 dB (0 dB = 1 V/Pa at 1 kHz)
Earphone socket	3.5 mm jack, stereo Impedance of 32 Ohm max. output voltage 160 mV
PC interface	For operating systems supported by Microsoft: USB 1.1, USB 2.0 high speed, USB 3.0 (compatible), USB removable disc, USB audio and USB HID (suitable as dictation microphone on the PC), USB power supply and battery recharging
Batteries	2 x 1,5 V; type Micro/AAA
Rechargeable battery	
	Rechargeable battery pack 962 (Li-ion rechargeable battery, 3.7V /1000mAh) about 4h
Charging time	up to 25 h (DSS recording format)
Operating time	up to 21 h (DSS Pro recording format)
Dimensions	
Dictation device (LxWxD, without protruding user controls)	approx. 130 x 52 x 22 mm / 5.12 x 2.05 x 0.87 inch
Weights	
Dictation device incl. rechargeable battery pack 962	approx. 125 g / 4.303 oz
Internal speaker	
Diameter	28 mm
Max. power output	200 mW
Storage temperature	-20° C up to +70° C / -4° F up to 158° F
Operating temperature	-15° C up to +35° C / 5° F up to 95° F
Casing color	black

Housing			
Composite	•	•	–
Softtouch Composite (chromium plated decoration ring)	–	–	•
Operating elements			
Slide switch	•	–	•
Configurable function keys	–	–	2
Left-handed operation	–	–	•
In-built microphones	1	1	2
Recording formats			
DSS, DSS Pro (overwrite, insert, attach, mono)	•	•	•
WAV (mono, stereo, overwrite, insert, attach)	–	–	•
MP3 (attach, mono, stereo)	–	–	•
Workflow			
Priority	•	•	•
Deadline	•	•	•
Workflow lists:			
Worktypes and sub dictation types	20	20	20
Secretaries	20	20	20
Authors	1	1	20
Groups	–	–	20
Categories	–	–	20
Text editor for dictation ID	•	•	•
Index function	•	•	•
Info function	–	–	•
Data list with up to 3000 entries	–	–	•
Postponed dictation / EOL	–	–	•
Lock the dictation			
Send to speech recognition (in DigtaSoft network)	•	•	•
Safety			
PIN enquiry when the device is switched on (can be turned off), ensuring access protection of the internal memory, dictation encryption 128/256 bit with password protection, confusion proof UUID of each dictation	•	•	•
Special functions			
Quick help function	•	•	•
Reporting on dictations finished in the office and questions to the author	–	–	•
Automatic follow-up dictation by setting a specific time	•	•	•
Transcription workstation operation with foot control (only with Digta Station 447 Plus)	–	–	•
Insert function at the touch of a button	•	•	•
Profiles			
Easy Mode, Menu Mode	•	•	•
Freely configurable profiles	–	–	10
Motion sensor			
Automatic wake-up, display swivels with left-handed use	–	–	•
Speech recognition			
Zeicheneingabe via Nuance VoCon Engine	–	–	•
Scope of delivery			
USB cable, pouch, wrist strap	•	•	•
2 x Alkaline AAA batteries	•	•	–
Rechargeable battery pack 962	–	–	•
Slider Key (Slide switch setting)	•	–	•
Power Supply Unit 477	–	–	•