



## Digta Soundbox 830

*The professional tool for the voice playback*

MADE IN GERMANY



### Digta Soundbox 830


#### High quality voice reproduction

The Digta Soundbox 830 gives you the best possible recording reproduction.

Thanks to the high compatibility with almost all devices from the wide range of Grundig Business Systems you can simply use existing accessories.

- Small amount of space required
- Integrated sound card ensures high reproduction quality – independent of the PC system

- Compatible with existing Grundig Business Systems accessories such as foot controls and headsets
- USB interface
- Extensive range of accessories
- Available with dictation software or playback software. Consult your local Grundig Business Systems partner.



Connect directly to the PC




Compatible with existing foot control and headsets from Grundig Business Systems

[www.grundig-gbs.com](http://www.grundig-gbs.com) · [info@grundig-gbs.com](mailto:info@grundig-gbs.com) · Infoline: +49(0) 911-47 58-4

Your Grundig Business Systems Partner:

## Controls

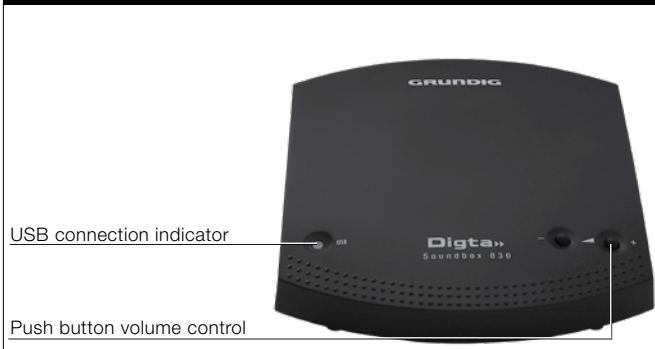

## Connections



## Functions

<i>Sound card</i>	Built in sound card for best possible voice reproduction
<i>Functionality</i>	Easy use with push buttons for volume control – loud / quiet
<i>Connectors for accessories</i>	Connection for Grundig Business Systems 536 foot control and headset (e.g. Swingphone 568 GBS) and 0.14 inch. (3.5 mm) jack socket for active loudspeakers (optional, no GBS accessory)
<i>Display LED</i>	USB active: green
<i>Ergonomics</i>	Ergonomic position at the work station
<i>Investment Reliability</i>	Investment reliability ensured by using Grundig Business Systems accessories from 1994 onward

## Scope of delivery

Digta Soundbox 830  
USB-cable for PC connection

## Optional accessories

<i>Foot Control</i>	Grundig Business Systems foot switch 536
<i>Headphone</i>	Grundig Business Systems Swingphone 568 GBS, Digta Headphone 565 GBS, Digta Earphone 957 GBS

## Technical Data

<i>LED indicator</i>	Single colour (USB connect)
<i>Connections</i>	USB 1.1/2.0 socket (Mini-B) Connection for Grundig foot control and headset Stereo jack socket Ø 0.14 inch. (3.5 mm) for active loudspeakers
<i>Built-in sound card</i>	USB audio device
<i>Transmission range</i>	200 - 12,500 Hz
<i>Power consumption</i>	USB (Self-powered – 500 mA)
<i>Output voltage</i>	1200 mV with 300 Ω (headphone connection) 160 mV with 32 Ω (stereo jack plug)
<i>Housing</i>	High-quality ABS plastic, stable metal base
<i>Colour</i>	low gloss black
<i>Temperature Storing</i>	-20°C (-4°F) to +70°C (158°F)
<i>Temperature operating</i>	-5°C (+23°F) to +35°C (95°F)
<i>Dimensions</i>	(H x W x D) approx. 1.18 x 4.33 x 4.88 inch. (30 x 110 x 124 mm)
<i>Weight</i>	Approx. 4.93 ounce (140 g)

## Digta Transcription Premium Kit



Complete Package for the Transcript Station:

- Digta Soundbox 830
- Foot control 536
- Digta Swingphone 568 GBS
- PC-Software DigtaSoft One or DigtaSoft Pro

The performance features described by Grundig only apply to genuine Grundig accessories. The use of non-Grundig Business Systems accessories or those which are not recommended and approved by Grundig Business Systems automatically void any warranty claims towards Grundig Business Systems.

Grundig Business Systems GmbH, Emmericher Straße 17, D-90411 Nuremberg  
E-Mail: info@grundig-gbs.com, Internet: www.grundig-gbs.com.

Printed in Germany.  
Alterations and availability are subject to change.  
Order-number: HNE 5108 06/2016

## Technical information

Please find the system requirements of the current version at [www.grundig-gbs.com/en/system](http://www.grundig-gbs.com/en/system).