

# Digta 7

DICTATION REINVENTED



## Digta Station 447 Digta Station 447 Plus

MADE IN GERMANY



### Digta Station 447 series

Due to the noble black Digta Station 447 your Digta 7 will be always within reach and have its fixed place on the desk. The design of the dictation device and the Docking Station goes back to a holistic approach focusing on a high level of easy to use functions. As soon as the Digta 7 is seated in the Docking Station it connects with the PC and dictation transfer starts automatically. The lithium ion battery pack is recharged in the device at the same time. After dictation transfer you remove your Digta 7 with a flick of the wrist.

The Digta Station 447 Plus version comes with a rechargeable battery pack 962 in the battery compartment, thus allowing you to have a fully charged second battery with you at any time.

Connections for headphone and foot control matching the approved Grundig accessories make for another plus, allowing handsfree dictation by means of the foot control. The Digta Station 447 Plus together with a Digta 7 Premium even becomes a transcription station without PC.

- Digta Station 447 – Connection with the PC
- Digta Station 447 Plus – The multi-purpose solution

[www.grundig-gbs.com](http://www.grundig-gbs.com) · [info@grundig-gbs.com](mailto:info@grundig-gbs.com) · Infoline: +49(0)911-47 58-1

Your Grundig Business Systems Partner:




Charging and dictation transfer.



For the Digta 7.

**GRUNDIG**  
Business Systems

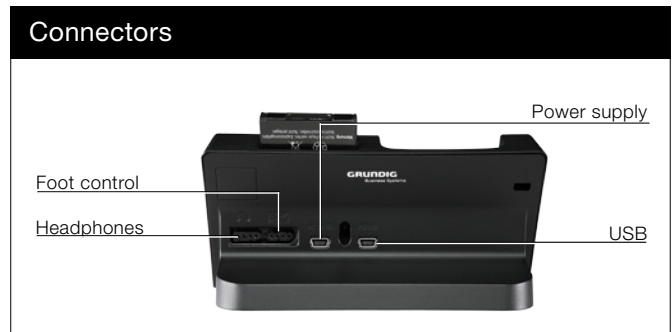

## Technical Data

<i>Connectors</i>	
PC interface	Mini USB plug
Digta 7 Docking Connection	Contact bar for USB 1.1, USB 2.0 High Speed USB removable media, USB audio and USB HID USB power supply and battery charging
<i>Charging time</i>	
	approx. 4 hours
<i>Lights</i>	
Charging display (only Digta Station 477 Plus)	Green LED, lights up green during the recharging process of the spare battery in the battery case
Power supply indicator	Green LED, lights up during power supply via power supply or USB
Data transfer display	Yellow LED, lights up during USB connection, flashes during data transfer
<i>Size</i>	
Digta Station 447 without rechargeable batteries, without dictation device (W x H x D)	approx. 5.63 x 2.72 x 3.03 inch (143 mm x 69 mm x 77 mm)
Digta Station including dictation device (H)	approx. 5.47 inch
<i>WEIGHT</i>	
Digta Station 447 without rechargeable batteries, without dictation device	approx. 9.49 oz. (269 g)
<i>Storage temperature</i>	-4° F up to 158° F ( -20 °C up to +70 °C)
<i>Operating temperature</i>	23° F up to 95° F (-5 °C up to + 35 °C)
<i>Casing color</i>	black

## Equipment

	Digta Station 447	Digta Station 447 Plus
<i>Charging</i>		
in the Digta 7	•	•
Charging of a spare pack of rechargeable batteries	--	•
<i>Connectors</i>		
Foot control, earphone connection	--	•
Kensington lock connection	•	•

## Scope of delivery

<i>Digta Station 447</i>	USB cable, Rechargeable battery pack 962, Power pack 447
<i>Digta Station 447 Plus</i>	USB cable, Rechargeable battery pack 962, Power pack 447

The performance features described by Grundig Business systems (GBS) only apply to genuine GBS accessories. The use of non-GBS accessories or those which are not recommended and approved by GBS automatically void any warranty claims towards GBS.

Grundig Business Systems GmbH Emmericher Straße 17, D-90411 Nuremberg  
E-Mail: info@grundig-gbs.com, Internet: www.grundig-gbs.com.  
Printed in Germany.  
Alterations and availability are subject to change without prior notice.  
Order-number: HNE 6239 06/2015